

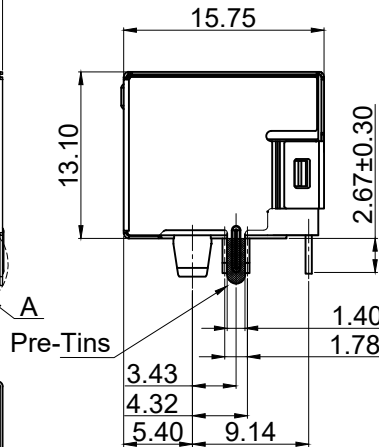
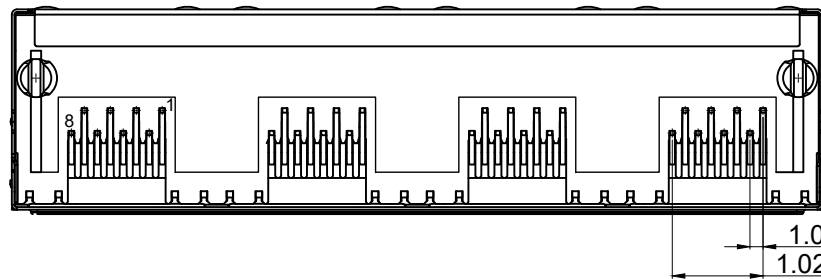
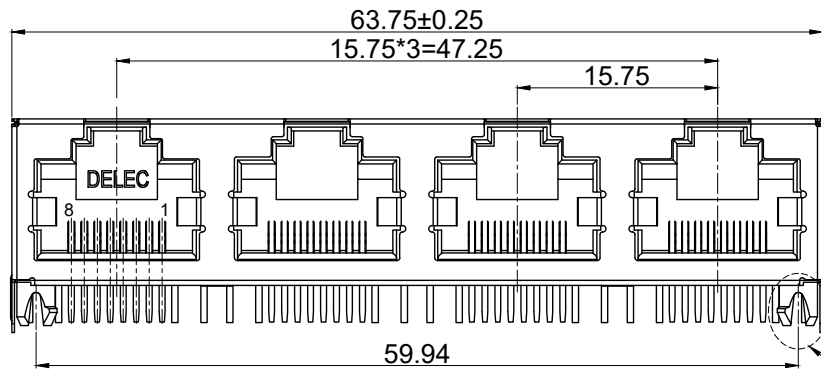


1	2	3	4	5	6	7	8																																						
H																																													
G																																													
F	SPECIFICATION FOR APPROVAL																																												
E	 <table><tr><td>MARKETING GROUP</td><td>R&D GROUP</td><td>QA GROUP</td></tr><tr><td>ISSUED BY</td><td>CHECKED BY</td><td>QA INSPECTION</td></tr><tr><td>chen</td><td>Weide Li</td><td>Ting Liu</td></tr></table>			MARKETING GROUP	R&D GROUP	QA GROUP	ISSUED BY	CHECKED BY	QA INSPECTION	chen	Weide Li	Ting Liu	CUSTOMER CUSTOMER APPROVAL: ☐ APPROVAL ☐ CONCESSIONARY ☐ REJECTED ISSUED BY : _____ CHECKED BY: _____ APPROVED BY: _____ COMMENTS : _____ _____																																
MARKETING GROUP	R&D GROUP	QA GROUP																																											
ISSUED BY	CHECKED BY	QA INSPECTION																																											
chen	Weide Li	Ting Liu																																											
D	CUSTOMER: _____																																												
C	CUSTOMER PART NO: _____																																												
B	SAMPLE Q'TY: _____																																												
A	<table><tr><td colspan="4">TITLE</td><td colspan="2"></td><td colspan="2"> 多亞電子有限公司 Duoya Electronics Co.,Ltd</td></tr><tr><td colspan="4">PART NO.</td><td colspan="2">GENERAL TOLERANCE</td><td></td><td>UNIT:MM(INCH)</td><td>SIZE: A4</td></tr><tr><td>DRAW</td><td>chen</td><td>DATE</td><td>2026-08-17</td><td>X±0.35</td><td>.X±1°</td><td rowspan="3">SCALE: 1:1</td><td rowspan="3">SHEET: 1/5</td><td rowspan="3">REV:A</td></tr><tr><td>CHECK</td><td>Li</td><td>DATE</td><td>2026-08-17</td><td>.XX±0.25</td><td>.XX±0.5°</td></tr><tr><td>APPROVE</td><td>De</td><td>DATE</td><td>2026-08-17</td><td>.XXX</td><td></td></tr></table>							TITLE						 多亞電子有限公司 Duoya Electronics Co.,Ltd		PART NO.				GENERAL TOLERANCE			UNIT:MM(INCH)	SIZE: A4	DRAW	chen	DATE	2026-08-17	X±0.35	.X±1°	SCALE: 1:1	SHEET: 1/5	REV:A	CHECK	Li	DATE	2026-08-17	.XX±0.25	.XX±0.5°	APPROVE	De	DATE	2026-08-17	.XXX	
TITLE						 多亞電子有限公司 Duoya Electronics Co.,Ltd																																							
PART NO.				GENERAL TOLERANCE			UNIT:MM(INCH)	SIZE: A4																																					
DRAW	chen	DATE	2026-08-17	X±0.35	.X±1°	SCALE: 1:1	SHEET: 1/5	REV:A																																					
CHECK	Li	DATE	2026-08-17	.XX±0.25	.XX±0.5°																																								
APPROVE	De	DATE	2026-08-17	.XXX																																									
THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION																																													
EMAIL: INFO@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN																																													

BY DUOYA CONNECTOR CORPORATION
(B) COPYRIGHT 2010
PRODUCT DRAWING

	1	2	3	4	5	6	7	8		
H										
	ISSUE RECORD									
	REV	DESCRIPTION OF CHANGE			DRAW	APPROVE	ISSUE DATE			
G	A	FIRST ISSUE			CHEN	De	2026-05-08			
F										
E										
D										
C										
B										
A										
TITLE					1X4 RJ45 8P8C SIDE ENTRY JACK WITH LED				 多亞電子有限公司 Duoya Electronics Co.,Ltd	
PART NO.					DY58-QA14145-00G		GENERAL TOLERANCE			
DRAW					chen	DATE	2026-08-17	.X±0.35	.X±1°	
CHECK					Li	DATE	2026-08-17	.XX±0.25	.XX±0.5°	
APPROVE					De	DATE	2026-08-17	.XXX		
									SCALE: 1:1	
									SHEET: 2/5	
									REV:A	
THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION										
EMAIL: INFO@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN										
PRODUCT DRAWING										

MECHANICAL DIMENSION

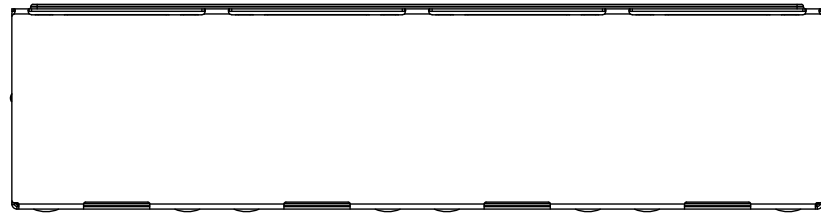

DETAIL A
SCALE 2:1

Product Description

1. Materials:

- Plastic Housing: thermoplastic, flammability rating UL94V-0 (color :pantone Black)
- Contacts: Phosphor bronze, T=0.30mm
- 6 u" plated on contact area
- Matte Tin plated 80u" min on solder area;
- Nickel 50u" min under plating over
- Shielded: Stainless Steel (T=0.20mm); Pins: Tin Plated

2. Mechanical Characteristics:

- Insertion/removal cycles: Min. 750


3. Electrical Characteristics:

- Current rating: 1.5 AMP
- Voltage rating: 125 VAC max.
- Contact resistance: 30 mΩ max.
- Insulation resistance: 500 MΩ min. @ 500 VDC
- Dielectric strength: 1000 VAC RMS, 60Hz, 1 min


4. Environmental:

- Operating temperature: -40°C ~ +85°C
- Storage temperature: -40°C ~ +85°C

TITLE 1X4 RJ45 8P8C SIDE ENTRY JACK WITH LED								多亞電子有限公司 Duoya Electronics Co.,Ltd	
PART NO. DY58-QA14145-00G						GENERAL TOLERANCE			UNIT:MM(INCH)
DRAW	chen	DATE	2026-08-17	.X±0.35	.X±1°			SCALE: 1:1	SHEET: 3/5
CHECK	Li	DATE	2026-08-17	.XX±0.25	.XX±0.5°				
APPROVE	De	DATE	2026-08-17	.XXX					
								SIZE: A4	REV:A

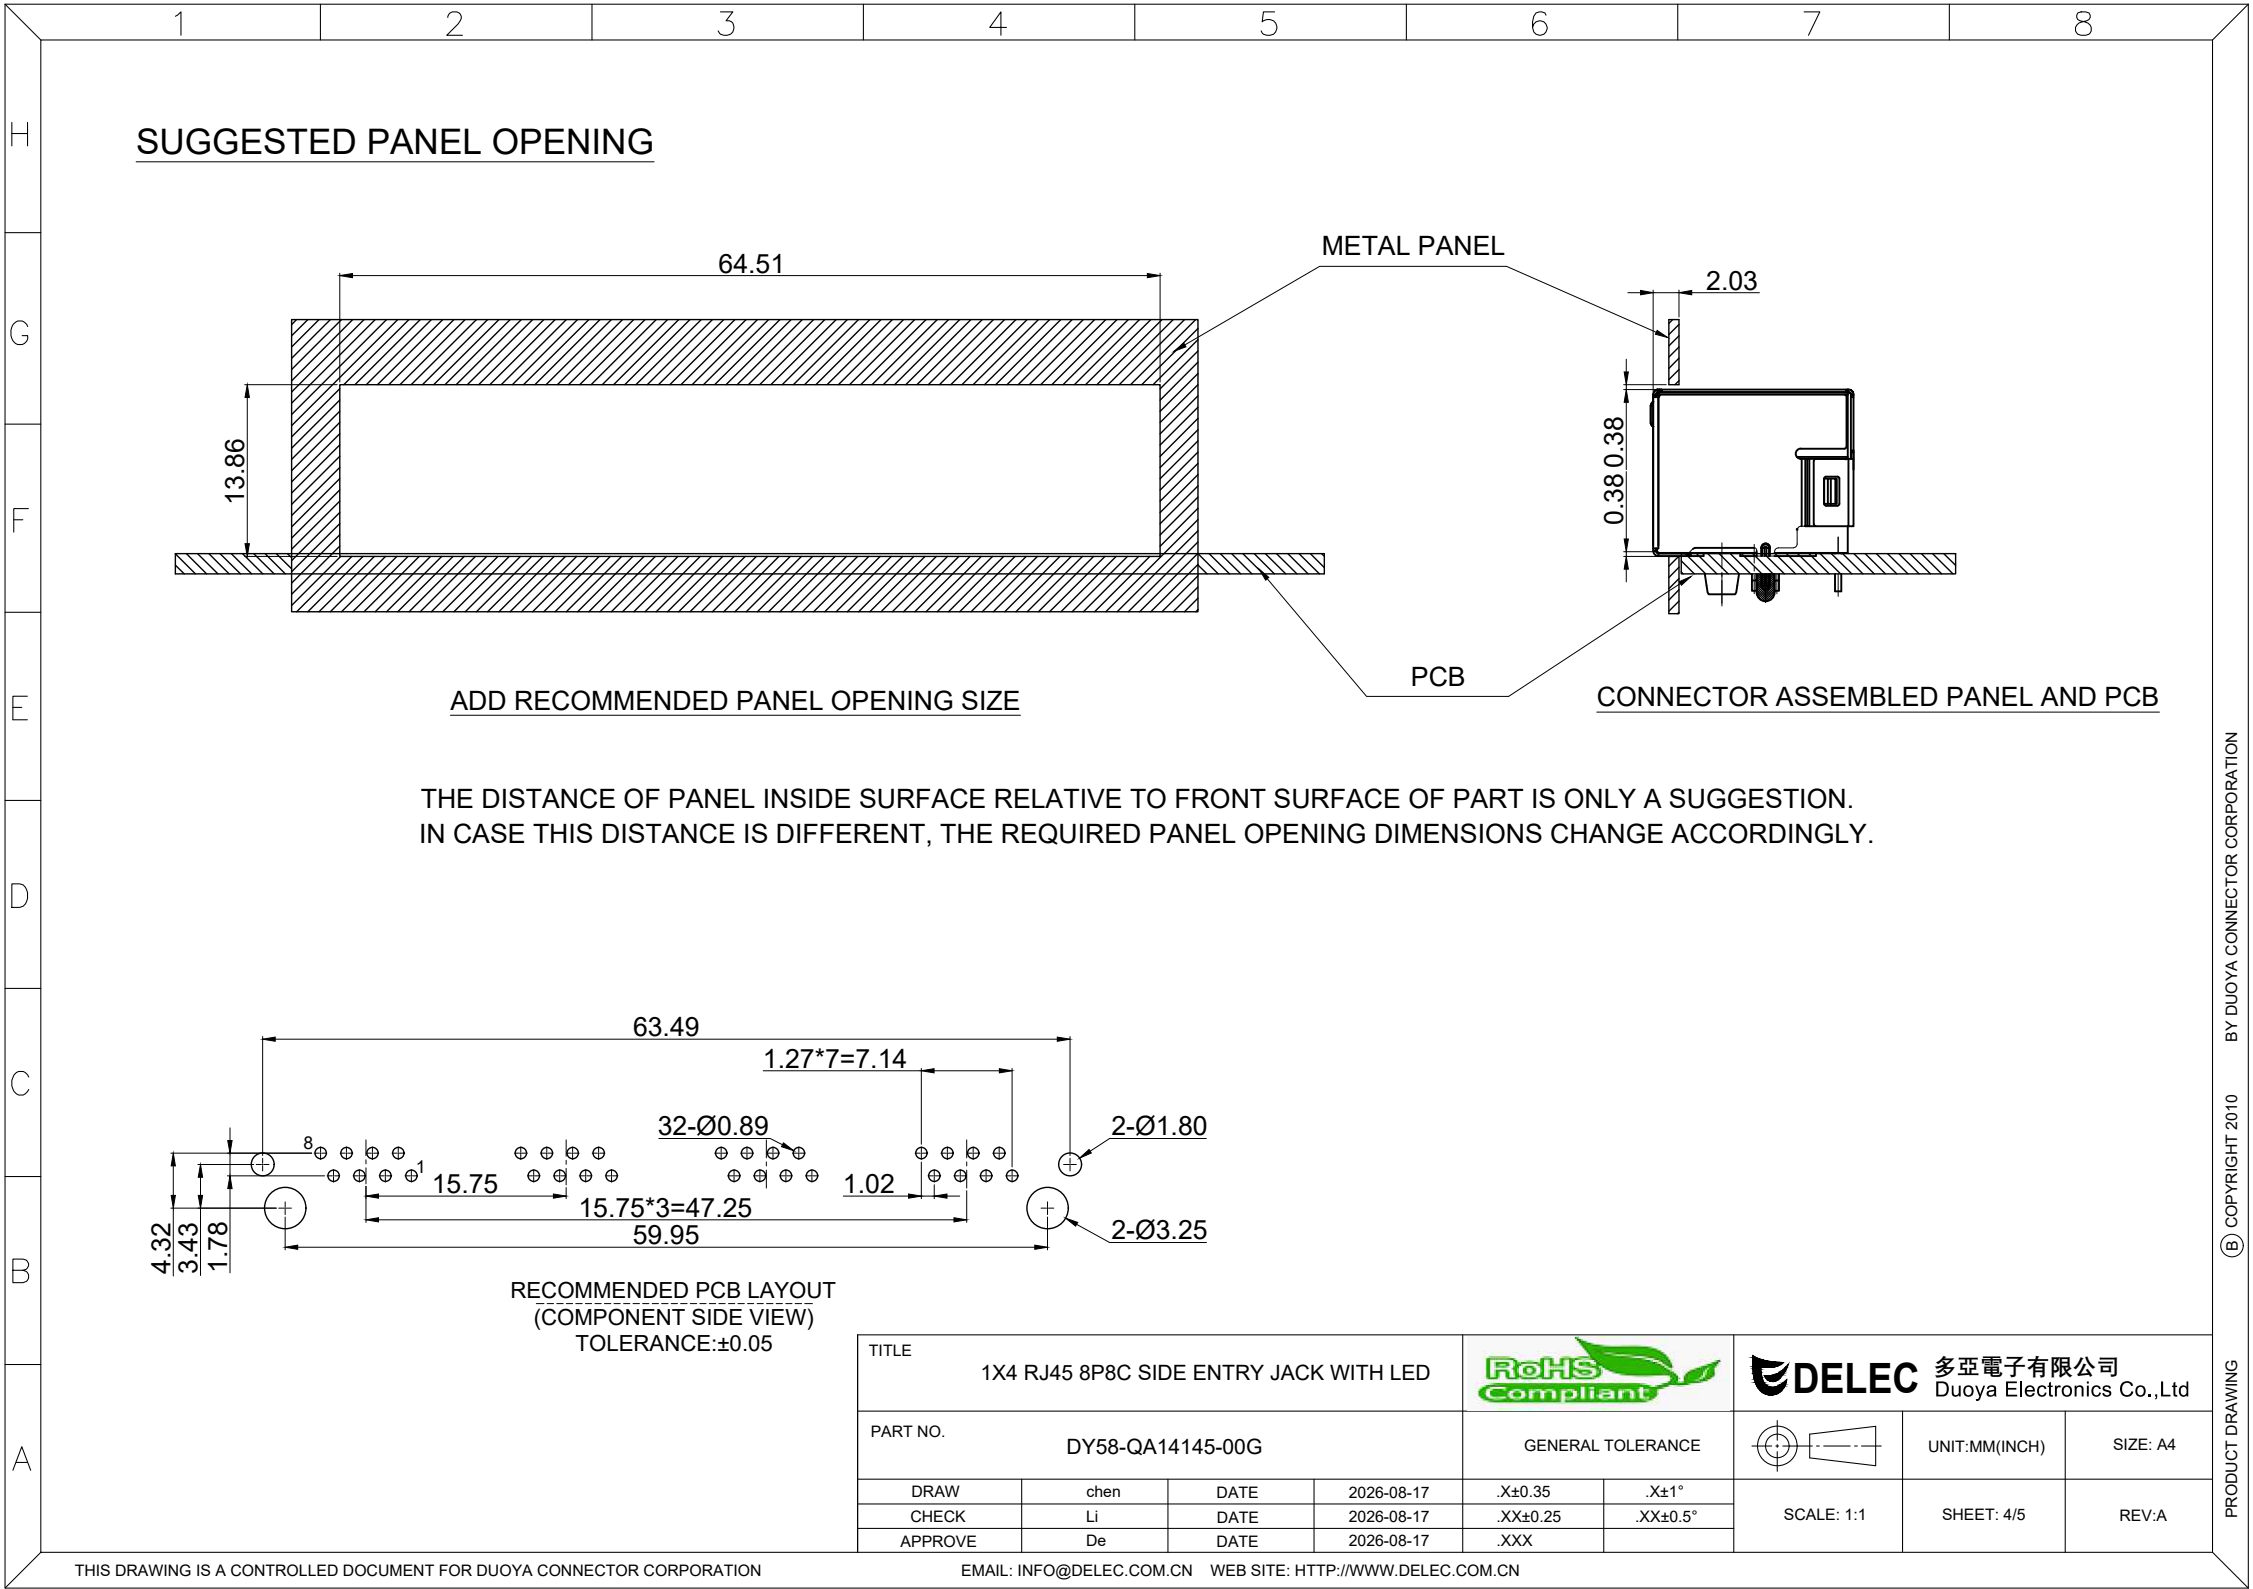

PACKAGE INFORMATION AND LABEL

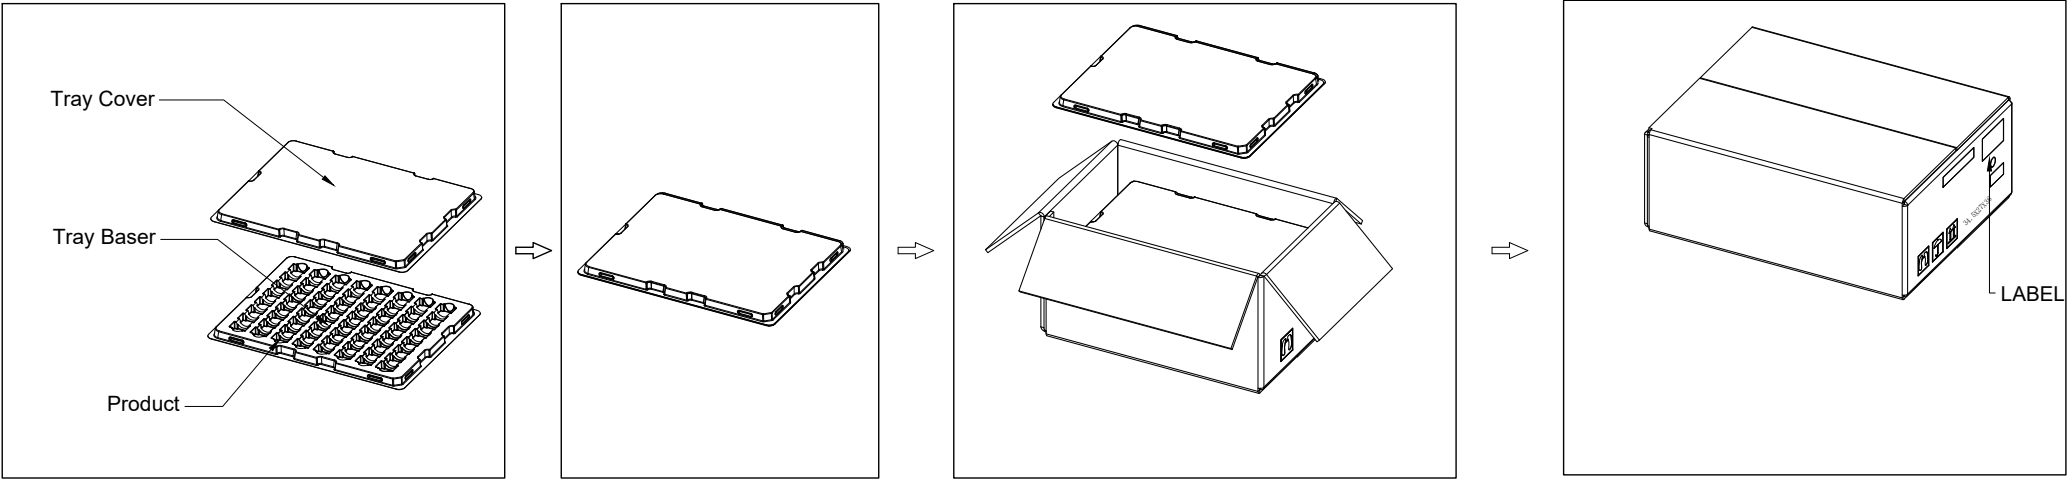

PACKING QUANTITY : 40 PCS FINISHED GOODS PER TRAY
15 TRAYS (600 PCS FINISHED GOODS) PER CARTON BOX

TITLE 1X4 RJ45 8P8C SIDE ENTRY JACK WITH LED						多亞電子有限公司 Duoya Electronics Co.,Ltd		
PART NO. DY58-QA14145-00G				GENERAL TOLERANCE			UNIT:MM(INCH)	SIZE: A4
DRAW	chen	DATE	2026-08-17	.X±0.35	.X±1°		SCALE: 1:1	SHEET: 5/5
CHECK	Li	DATE	2026-08-17	.XX±0.25	.XX±0.5°			
APPROVE	De	DATE	2026-08-17	.XXX				REV:A