SPECIFICATION FOR APPROVAL

DELEC		
MARKETING GROUP	R&D GROUP	QA GROUP
ISSUED BY	CHECKED BY	QA INSPECTION
Peter	Weide Li	Liu Ting

CUSTOMER:_____

CUSTOMER PART NO: _____

SAMPLE Q'TY: _____

CUSTOMER

CUSTOMER APPROVAL:

☐ APPROVAL ☐ CONCESSIONARY ☐ REJECTED

ISSUED BY : _____

CHECKED BY: _____

APPROVED BY: _____

COMMENTS : _____

_____

TITLE: 1X1 6P2C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO.: DY9752-1D11017-006				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-22	.X±0.20	.X±1°	SCALE: 1:1	REV:A
CHECK	Peter	DATE	2016-03-22	.XX±0.15	.XX±0.5°	SHEET: 1/4	
APPROVE	De	DATE	2016-03-22	.XXX±0.10			

BY DUOYA CONNECTOR CORPORATION
©COPYRIGHT 2010
PRODUCT DRAWING
THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION
EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

ISSUE RECORD

REV	DESCRIPTION OF CHANGE	REVIEWED BY	APPROVED BY	ISSUE DATE
A	FIRST ISSUE	Peter	De	2016-03-22

RoHS Compliant

TITLE: 1X1 6P2C VERTICAL WITHOUT LED

DELEC 東莞多亞電子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD

PART NO. DY9752-1D11017-006

GENERAL TOLERANCE

UNIT:MM(INCH) | SIZE: A4

DRAW	Peter	DATE	2016-03-22	.X±0.20	.X±1°
CHECK	Peter	DATE	2016-03-22	.XX±0.15	.XX±0.5°
APPROVE	De	DATE	2016-03-22	.XXX±0.10	


SCALE: 1:1 | SHEET: 2/4 | REV:A

PRODUCT DRAWING ⓒCOPYRIGHT 2010 BY DUOYA CONNECTOR CORPORATION

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION

EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

MECHANICAL DIMENSION

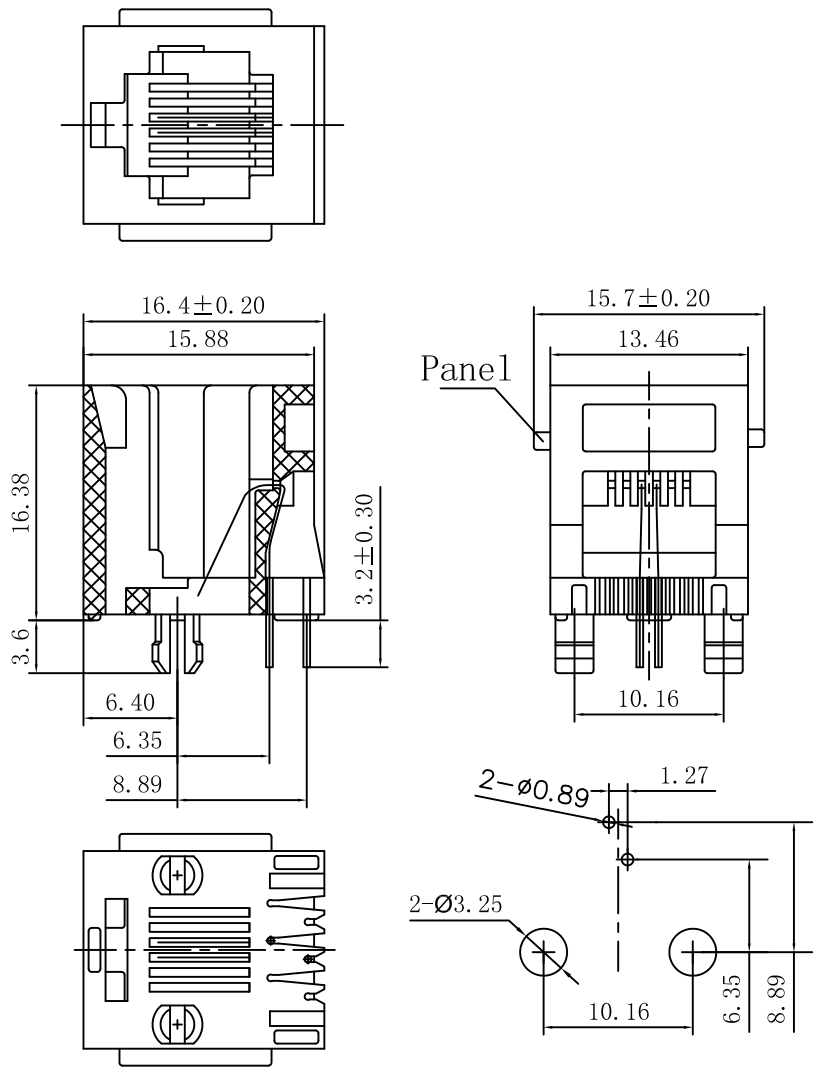

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE VIEW)

RoHS Compliant

SPECIFICATION AND PERFORMANCE

1 Scope

This specification covers the requirements for product performance, tests and quality assurance provisions for side entry PCB jack

2 Applicable document

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing shall take precedence

3 Materials

Housing:Glass filed polyester UL94V-0, pantone Black
Contact: phosphor bronze 0.46mm round Pin
Plating: 6u"Gold plating over nickel
PCB retention fre-solder:1LB min.

4 Mechanical characteristics:

Durability:750(modular jack) insertion/plug dimension cycles at min. rate of 120 cycles per minute

5 Electrical

Current rating:	1.5AMP
Voltage rating:	125VAC max.
Contact resistance:	30 milliohms max.
Insulation resistance:	500 megohms min.@500 VDC.
Dielectric strength:	1000 VAC RMS 60Hz,1min.

6 Environmental:

Operating temperature:	-40℃~+85℃
Storage temperature:	-40℃~+85℃

Mates with modular plug conforming to FCC part 68 subpart F.


7 Applicable printed circuit board

The product is designed to meet the electrical, mechanical and environmental performance requirements specified in product drawing

TITLE: 1X1 6P2C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO.: DY9752-1D11017-006				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-22	.X±0.20	.X±1°	SCALE: 1:1	SHEET: 3/4	REV:A
CHECK	Peter	DATE	2016-03-22	.XX±0.15	.XX±0.5°			
APPROVE	De	DATE	2016-03-22	.XXX±0.10				

BY DUOYA CONNECTOR CORPORATION
©COPYRIGHT 2010
PRODUCT DRAWING
THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION
EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

PACKAGE INFORMATION AND LABLE

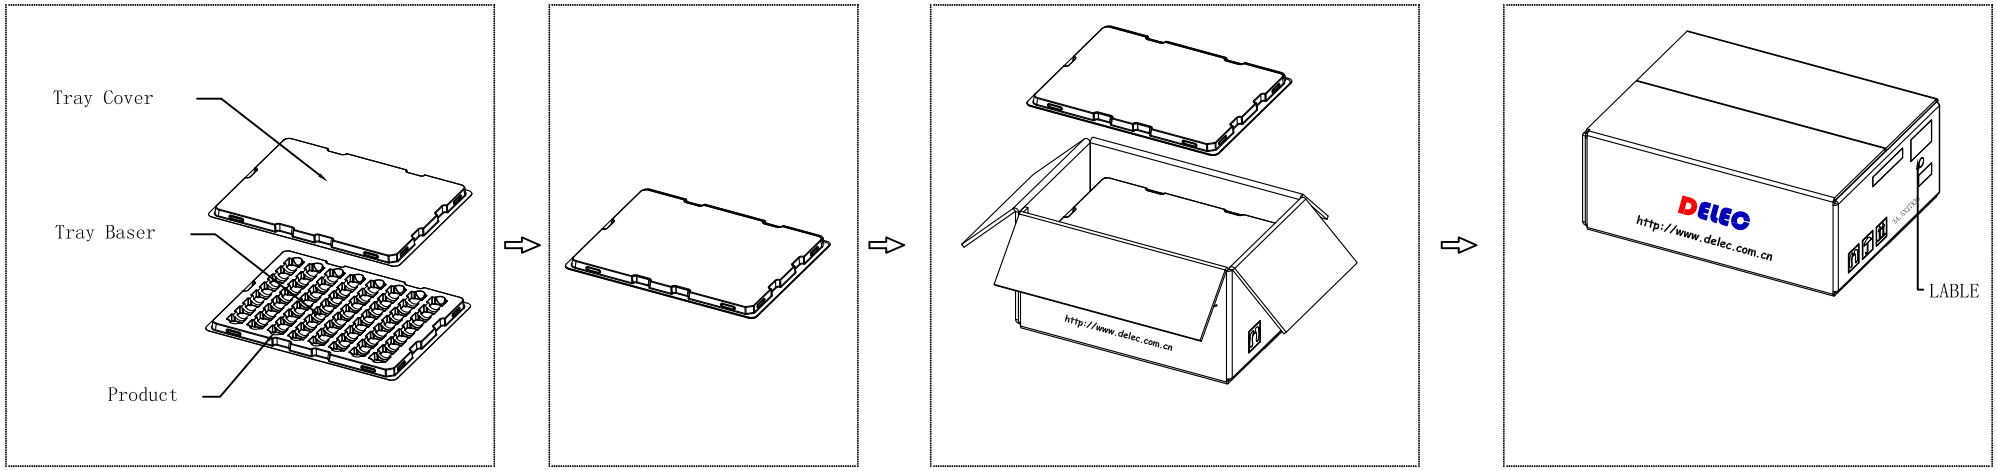

PACKING QUANTITY : 128 PCS FINISHED GOODS PER TRAY
18 TRAYS (2304 PCS FINISHED GOODS) PER CARTON BOX

TITLE: 1X1 6P2C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO.: DY9752-1D11017-006				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-22	.X±0.20	.X±1°	SCALE: 1:1	SHEET: 4/4	REV:A
CHECK	Peter	DATE	2016-03-22	.XX±0.15	.XX±0.5°			
APPROVE	De	DATE	2016-03-22	.XXX±0.10				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA CONNECTOR CORPORATION
EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN
BY DUOYA CONNECTOR CORPORATION
©COPYRIGHT 2010
PRODUCT DRAWING