SPECIFICATION FOR APPROVAL

DELEC		
MARKETING GROUP	R&D GROUP	QA GROUP
ISSUED BY	CHECKED BY	QA INSPECTION
Peter	Weide Lee	Tingliu

CUSTOMER

CUSTOMER APPROVAL:

☐ APPROVAL ☐ CONCESSIONARY ☐ REJECTED

ISSUED BY : _____

CHECKED BY: _____

APPROVED BY: _____

CUSTOMER: _____

CUSTOMER PART NO: _____

SAMPLE Q'TY: _____

COMMENTS : _____

TITLE: 1X2 6P6C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 Dongguan Duoya Electronics Co.,Ltd			
PART NO.: DY9752-2D02034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-11-19	.X±0.30	.X±1°	SCALE: 1:1	SHEET: 1/4	REV:A
CHECK	Peter	DATE	2016-11-19	.XX±0.20	.XX±5°			
APPROVE	De	DATE	2016-11-19	.XXX±0.10				

PRODUCT DRAWING Ⓑ COPYRIGHT 2008 BY DUOYA ELECTRONICS CORPORATION

ISSUE RECORD


REV	DESCRIPTION OF CHANGE	REVIEWED BY	APPROVED BY	ISSUE DATE
A	FIRST ISSUE	Peter	De	2016-11-19


RoHS Compliant

TITLE: 1X2 6P6C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 Dongguan Duoya Electronics Co.,Ltd			
PART NO.: DY9752-2D02034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-11-19	.X±0.30	.X±1°	SCALE: 1:1	SHEET: 2/4	REV:A
CHECK	Peter	DATE	2016-11-19	.XX±0.20	.XX±5°			
APPROVE	De	DATE	2016-11-19	.XXX±0.10				


PRODUCT DRAWING Ⓑ COPYRIGHT 2008 BY DUOYA ELECTRONICS CORPORATION


MECHANICAL DIMENSION




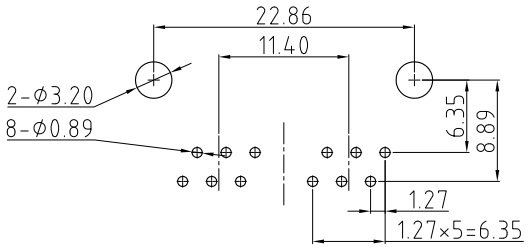



RECOMMENDED PCB LAYOUT
COMPONENT SIDE T=1.2mm



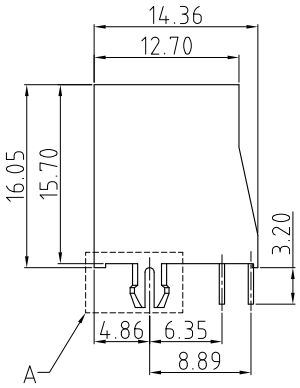





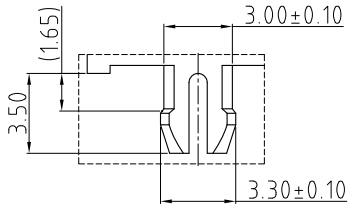

DETAIL A
SCALE 2:1

SPECIFICATION AND PERFORMANCE

1 Scope
This specification covers the requirements for product performance, tests and quality assurance provisions for side entry PCB jack

2 Applicable document
The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing shall take precedence

3 Materials
Housing:Glass filed polyester UL94V-0, pantone Red 185C
Contact: phosphor bronze Ø=0.46mm round Pin
Plating: F u"Gold plating over nickel
PCB retention fre-solder:1LB min.

4 Mechanical characteristics:
Durability:750(modular jack) insertion/plug dimension cycles

5 Electrical

Current rating:	1.5AMP
Voltage rating:	125VAC max.
Contact resistance:	30 milliohms max.
Insulation resistance:	500 megohms min.@500 VDC.
Dielectric strength:	1000 VAC RMS 60Hz,1min.

6 Environmental:
Operating temperature: -40°C~+85°C
Storage temperature: -40°C~+85°C
Mates with modular plug conforming to FCC part 68 subpart F.


7 Applicable printed circuit board
The product is designed to meet the electrical, mechanical and environmental performance requirements specified in product drawing

TITLE	1X2 6P6C VERTICAL WITHOUT LED			DELEC	東莞多亞電子有限公司 Dongguan Duoya Electronics Co.,Ltd		
PART NO.	DY9752-2D02034-001			GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-11-19	.X±0.30	.X±1°	SCALE: 1:1	SHEET: 3/4	REV:A
CHECK	Peter	DATE	2016-11-19	.XX±0.20	.XX±5°			
APPROVE	De	DATE	2016-11-19	.XXX±0.10				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA ELECTRONICS CORPORATION EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

PRODUCT DRAWING © COPYRIGHT 2008 BY DUOYA ELECTRONICS CORPORATION

PACKAGE INFORMATION AND LABLE

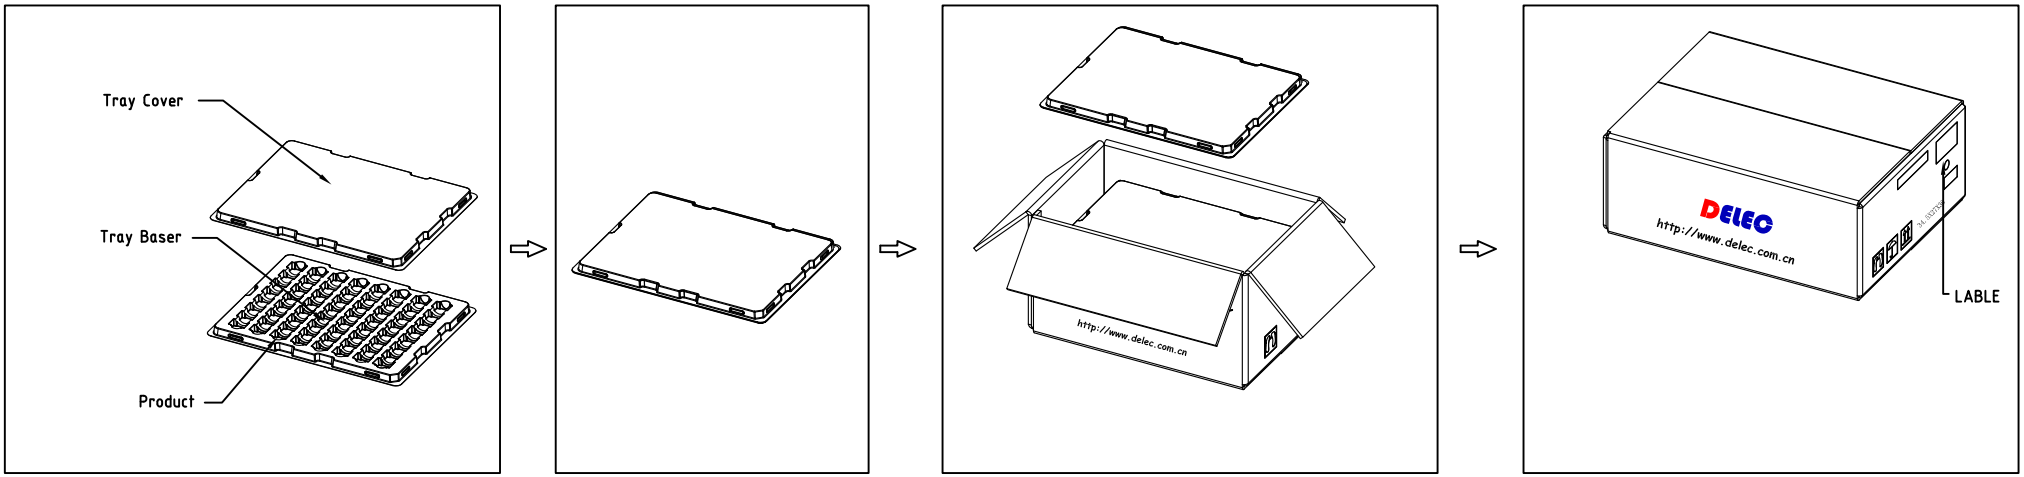

PACKING QUANTITY : 64 PCS FINISHED GOODS PER TRAY
18 TRAYS (1152 PCS FINISHED GOODS) PER CARTON BOX

TITLE: 1X2 6P6C VERTICAL WITHOUT LED				DELEC 東莞多亞電子有限公司 Dongguan Duoya Electronics Co.,Ltd			
PART NO.: DY9752-2D02034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-11-19	.X±0.30	.X±1°	SCALE: 1:1	SHEET: 4/4	REV:A
CHECK	Peter	DATE	2016-11-19	.XX±0.20	.XX±5°			
APPROVE	De	DATE	2016-11-19	.XXX±0.10				

PRODUCT DRAWING Ⓑ COPYRIGHT 2008 BY DUOYA ELECTRONICS CORPORATION