SPECIFICATION FOR APPROVAL

DELEC		
MARKETING GROUP	R&D GROUP	QA GROUP
ISSUED BY	CHECKED BY	QA INSPECTION
Peter	Weide Li	Liu Ting

CUSTOMER:_____

CUSTOMER PART NO: _____

SAMPLE Q'TY: _____

CUSTOMER

CUSTOMER APPROVAL:

☐ APPROVAL ☐ CONCESSIONARY ☐ REJECTED

ISSUED BY : _____

CHECKED BY: _____

APPROVED BY: _____

COMMENTS : _____

_____

TITLE: 6P6C TOP ENTRY JACK WITHOUT SHIELDED				DELEC 东莞多亚电子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD				
PART NO. DY9743-1A11034-001				GENERAL TOLERANCE			UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-08	.X±0.20	.X±1°	SCALE: 1:1	SHEET: 1/4	REV A
CHECK	Peter	DATE	2016-03-08	.XX±0.15	.XX±0.5°			
APPROVE	De	DATE	2016-03-08	.XXX±0.10				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA ELECTRONICS CORPORATION

EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

© COPYRIGHT 2010 BY DUOYA ELECTRONICS CORPORATION PRODUCT DRAWING

ISSUE RECORD

REV	DESCRIPTION OF CHANGE	REVIEWED BY	APPROVED BY	ISSUE DATE
A	FIRST ISSUE	Peter	De	2016-03-08

RoHS Compliant


TITLE: 6P6C TOP ENTRY JACK WITHOUT SHIELDED				DELEC 东莞多亚电子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO.: DY9743-1A11034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-08	.X±0.20	.X±1°	SCALE: 1:1	SHEET: 2/4	REV:A
CHECK	Peter	DATE	2016-03-08	.XX±0.15	.XX±0.5°			
APPROVE	De	DATE	2016-03-08	.XXX±0.10				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA ELECTRONICS CORPORATION

EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

© COPYRIGHT 2010 BY DUOYA ELECTRONICS CORPORATION PRODUCT DRAWING

MECHANICAL DIMENSION

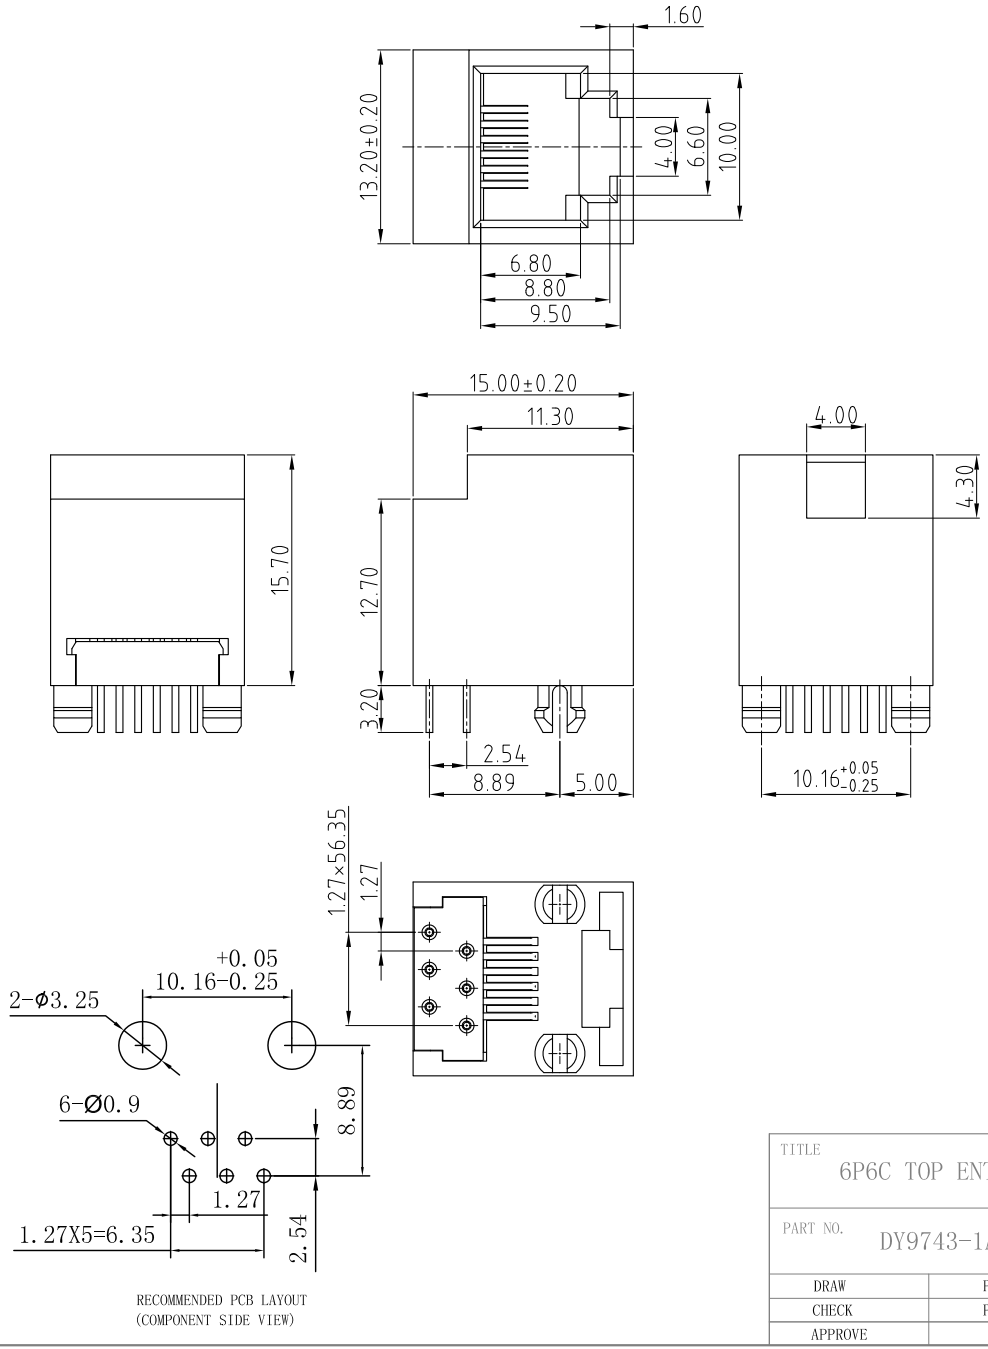

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE VIEW)

RoHS Compliant

SPECIFICATION AND PERFORMANCE

1 Scope

This specification covers the requirements for product performance, tests and quality assurance provisions for side entry PCB jack

2 Applicable document

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing shall take precedence

3 Materials

Housing:PA46 UL94V-0, pantone Black
Contact: phosphor bronze Ø=0.46mm Round Pin
Plating: F u"Gold plating over nickel
PCB retention fre-solder:1LB min.
PCB retention post-solder: 10 LBS MIN.

4.Mechanical characteristics:

Durability:750(modular jack) insertion/plug dimension cycles
Mates with modular plug conforming to FCC part 68 subpart F

5.Electrical

Current rating: 1.5AMP
Voltage rating: 125VAC max.
Contact resistance: 30 milliohms max.
Insulation resistance: 500 megohms min.@500 VDC.
Dielectric strength: 1000 VAC RMS 60Hz,1min.

6.Environmental:

Operating temperature: -40℃~+85℃
Storage temperature: -40℃~+85℃

7.Applicable printed circuit board

The product is designed to meet the electrical, mechanical and environmental performance requirements specified in product drawing


TITLE: 6P6C TOP ENTRY JACK WITHOUT SHIELDED				DELEC 东莞多亚电子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO. DY9743-1A11034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-08	.X±0.20	.X±1°	SCALE: 1:1	SHEET: 3/4 REV:A
CHECK	Peter	DATE	2016-03-08	.XX±0.15	.XX±0.5°		
APPROVE	De	DATE	2016-03-08	.XXX±0.10			

PRODUCT DRAWING BY DUOYA ELECTRONICS CORPORATION © COPYRIGHT 2010

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA ELECTRONICS CORPORATION

EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN

PACKAGE INFORMATION AND LABLE

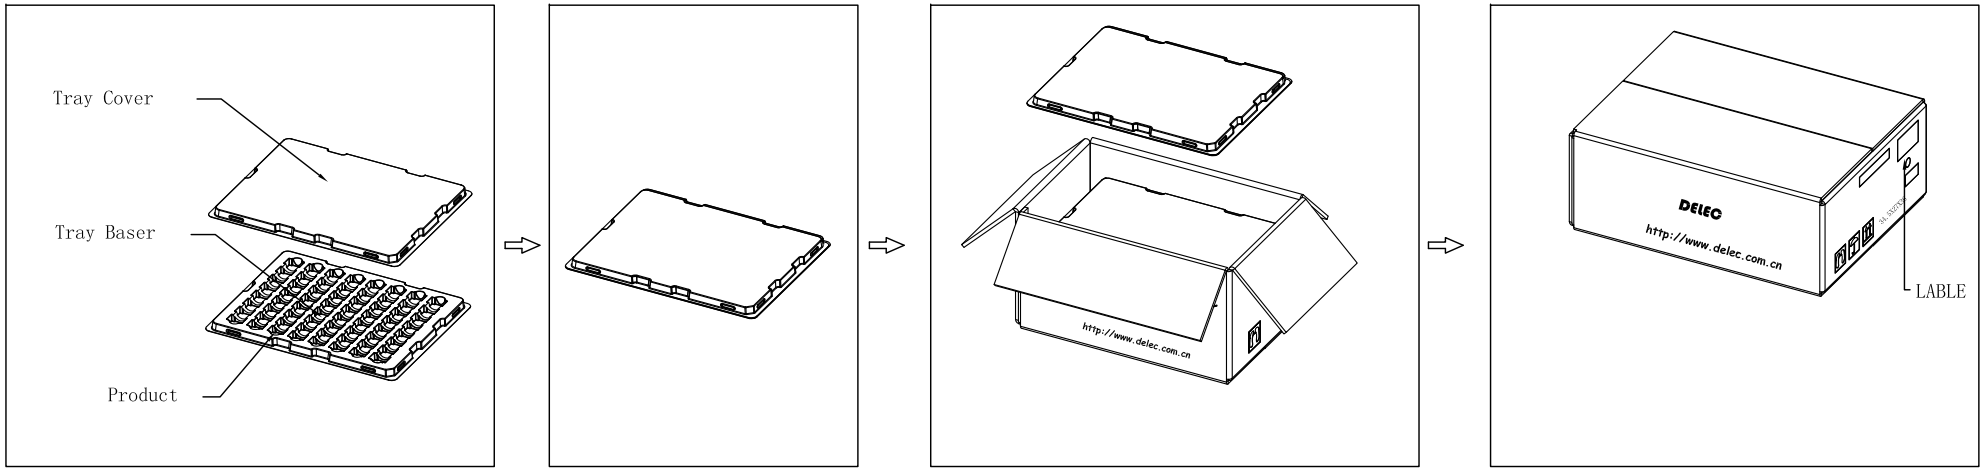

PACKING QUANTITY : 168 PCS FINISHED GOODS PER TRAY
20 TRAYS (3360 PCS FINISHED GOODS) PER CARTON BOX

TITLE: 6P6C TOP ENTRY JACK WITHOUT SHIELDED				DELEC 东莞多亚电子有限公司 DONGGUAN DUOYA ELECTRONICS CO., LTD			
PART NO. DY9743-1A11034-001				GENERAL TOLERANCE		UNIT:MM(INCH)	SIZE: A4
DRAW	Peter	DATE	2016-03-08	.X±0.20	.X±1°	SCALE: 1:1	REV:A
CHECK	Peter	DATE	2016-03-08	.XX±0.15	.XX±0.5°	SHEET: 4/4	
APPROVE	De	DATE	2016-03-08	.XXX±0.10			

THIS DRAWING IS A CONTROLLED DOCUMENT FOR DUOYA ELECTRONICS CORPORATION
EMAIL: MAILBOX@DELEC.COM.CN WEB SITE: HTTP://WWW.DELEC.COM.CN
PRODUCT DRAWING © COPYRIGHT 2010 BY DUOYA ELECTRONICS CORPORATION